


# HAULER® 1200

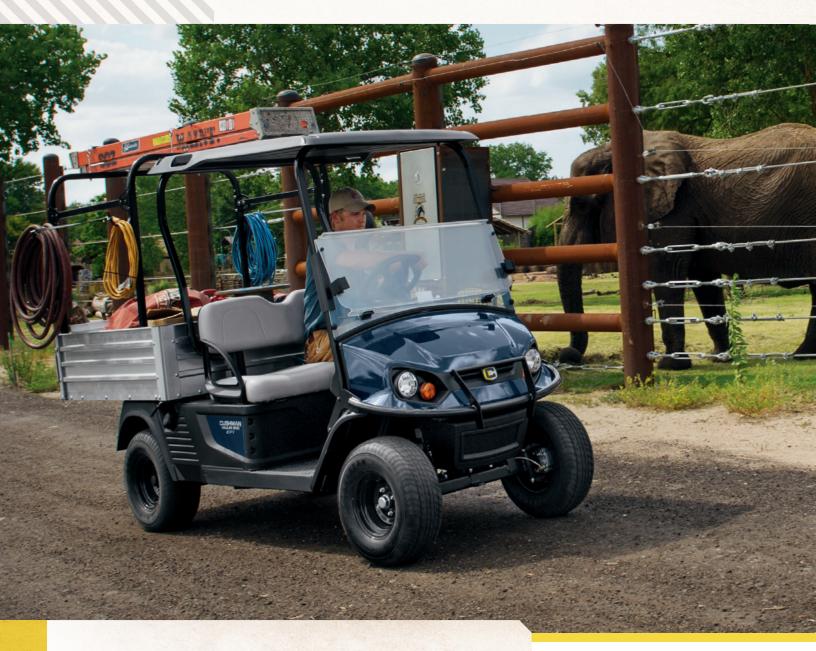

### LOADED WITH RELENTLESS FUNCTIONALITY.

The Hauler 1200 is equipped to tackle the burden of any job, with a rugged truck-like design. A large bed packed full of essential functionality can easily be converted for any task. Featuring tie down locations, divider slots and a full line of affordable accessories, transporting everything from sod to small equipment has never been easier. Your work is unforgiving, let the Hauler 1200 carry the load.

<b>13.5HP</b> EFI GAS	1500LB Tow Capacity
<b>12</b> CU FT	<b>1200</b> LB
CARGO BED	LOAD Capacity

LET'S WORK.®





## **CUSHMAN**<sup>®</sup> **HAULER**<sup>®</sup> 1200









### OPTIONS & ACCESSORIES

- Bed Dividers
- Long-Handled Tool Holder
- Cargo Mesh Netting
   L-Track Aluminum Bed System
   Weather Enclosure
- USB Outlet
- 12-Volt Outlet
- Canopy Storage Net
- Brush Guard
- Rearview Mirror
   ROPS-Certified Cab

•	Ladder/Hoop Rack

- Brake Lights
- Tail Lights
  E-Shield<sup>™</sup> Frame

- E-Shield<sup>10</sup> Frame
   Fuel/Oil Gauge
   Premium Steering Wheel
   Side Body Color
   Windshield
   LED Headlights
   Clum Post

- · Glove Box
- Floor Mount Attachment

BODY & CHASSIS	
FRAME	Welded Steel with DuraShield™ Powder Coat
BODY & FINISH	Injected Molded TPO
STANDARD COLOR	Patriot Blue, Forest Green
DIMENSIONS	
OVERALL LENGTH	111.9 in (302 cm)
OVERALL WIDTH	49.4 in (125.5 cm)
OVERALL HEIGHT W/CANOPY	70.5 in (179.1 cm)
WHEEL BASE	76.8 in (195.1 cm)
FRONT WHEEL TRACK	35 in (88.9 cm)
REAR WHEEL TRACK	38.5 in (97.8 cm)
GROUND CLEARANCE	3.5 in (8.9 cm)
CARGO BOX CAPACITY	12 cu ft (0.34m <sup>3</sup> )
POWER	
POWER SOURCE	4-cycle, 24.5 ci (401cc)
VALVE TRAIN	Single Cylinder OHV
HORSEPOWER (KW)	13.5 hp (10.1 kW)
ELECTRICAL SYSTEM	Starter/Generator, Solid-State Regulator
BATTERY (QTY/TYPE)	One 12V Maintenance Free
KEY OR PEDAL START	Pedal Start
AIR CLEANER	Replacable Dry Cartridge
LUBRICATION	Pressurized Oil System
OIL FILTER	Spin-On
COOLING SYSTEM	Air Cooled
FUEL CAPACITY	6.65 Gallon (25.2 L) Tank
DRIVE TRAIN	Continuously Variable Transmission (CVT)
TRANSAXLE	Differential with Helical Gears
GEAR SELECTION	Forward-Reverse
REAR AXLE RATIO	11.47:1 (Forward) 14.35:1 (Reverse)
PERFORMANCE	
SEATING CAPACITY	2 Person
CURB WEIGHT	980 lb (445 kg)
BED LOAD CAPACITY	800 lb (363 kg)
VEHICLE LOAD CAPACITY	1200 lb (545 kg)
SPEED	$14.5 \text{ mph} \pm 0.5 \text{ mph}$ (23.3 kph $\pm 0.8 \text{ kph}$ )
TOWING CAPACITY	1500 lb (680 kg) max
OUTSIDE CLEARANCE CIRCLE	21.5 ft (6.6 m)
STEERING & SUSPE	INSION
STEERING	Self-Compensating Rack and Pinion
FRONT/REAR SUSPENSION	Leaf Springs w/ Hydraulic Shock Absorbers
SERVICE BRAKE	Rear Wheel Mechanical Self-adjusting Drum
PARKING BRAKE	Self-compensating, Single Point Engagement
FRONT/REAR TIRES	18 x 8.5-8

#### www.cushman.com

©2019 Textron Specialized Vehicles Inc. Features and specifications of the vehicles are subject to change without notice. Vehicle as photographed may include options not included on base model.